
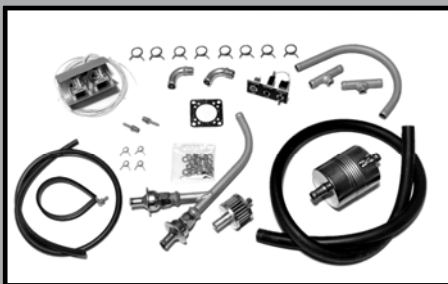
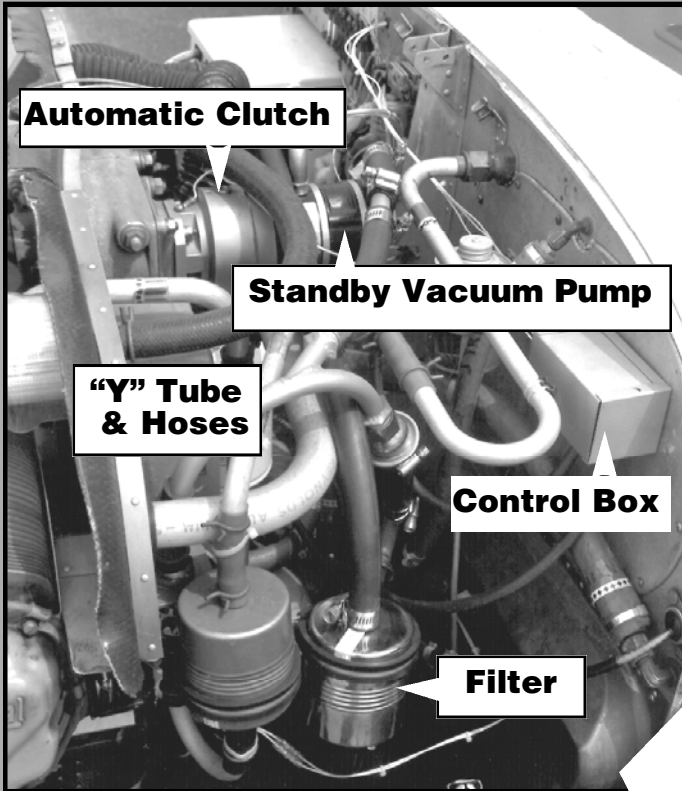


# BONANZA CLUTCH

KITS FOR AIR SYSTEMS  
& GENERATORS

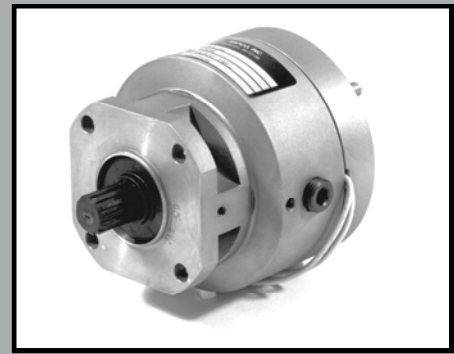

## STANDBY AIR SYSTEMS

- \* FAA-PMA & STC kits for Bonanza H models & after
- \* Automatic engagement when primary pump fails
- \* Available in 12 & 24 volt Pressure & Vacuum systems
- \* "Manual On" for preflight system test
- \* No radio interference and low current draw (1 Amp)

## CLUTCH KIT FOR USE WITH EXISTING STANDBY GENERATOR

- \* STC kits for Beech 33,35,36
- \* Available in 12 volt systems with Beechcraft factory standby kit # 35-0312 already installed. 24 volt systems require field approval
- \* Prevents Standby Generator from continuous operation
- \* System pays for itself in in overhaul savings alone !

**RAPCO, inc.**

**REPLACEMENT AIRCRAFT PARTS CO.**

445 Cardinal Lane  
Hartland, Wisconsin 53029 U.S.A.  
For a list of distributors, Please call  
(262) 367-2292 Phone (262) 367-7158 Fax  
[www.rapco-rfs.com](http://www.rapco-rfs.com)



151-clutch 9/00

Distributed By:

# WORKSHEET FOR RAPCO BONANZA CLUTCH SYSTEMS

(PLEASE MAKE COPIES OF THIS SHEET)

## COMPLETE FOR PRESSURE OR VACUUM SYSTEM KITS ONLY

**Pressure System - Kit # 400-P**  
**Vacuum System - Kit # 400-V**

1. Beechcraft Bonanza:  
 Model \_\_\_\_\_ Year \_\_\_\_\_  
 Serial # \_\_\_\_\_



2. Voltage Required      12       24

3. Air Regulator Location    LH       RH   
(For pressure systems, as viewed from pilot's seat, N/A for vacuum systems)

4. Air Pump Required      Yes       No

5. Choose placard type    Horizontal       Vertical

Approx. install time: 8-9 hours / Approx. weight - 9.5 lbs

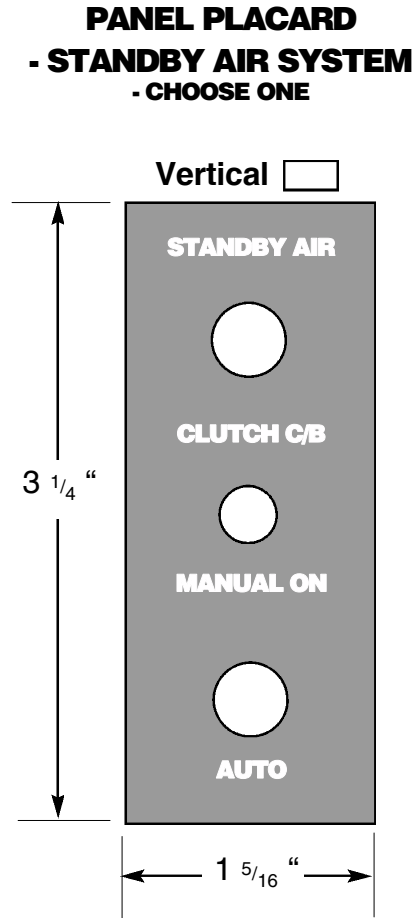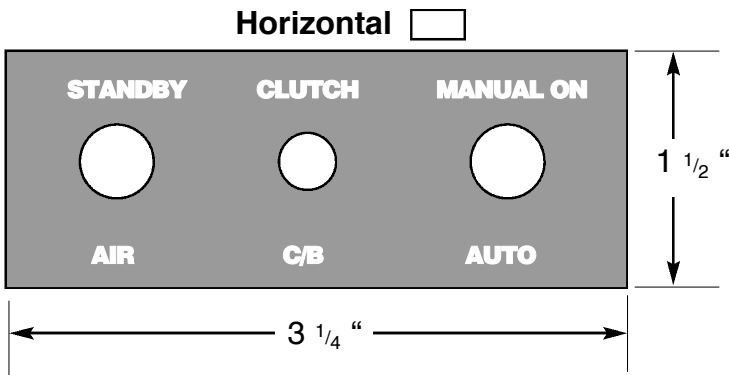

## COMPLETE THIS SECTION FOR GENERATOR KITS ONLY

**Generator Clutch - Kit # 400G**  
**- 12 Volt Only**

1. Beechcraft Bonanza:  
 Model \_\_\_\_\_ Year \_\_\_\_\_  
 Serial # \_\_\_\_\_

2. Does Aircraft have a factory standby generator kit installed? Yes  No

( 12 Volt aircraft must have the Beech Standby Generator Kit # 35-0312 already installed. This kit employs the T.R.W. P/N 360380013-1 Generator, not available from RAPCO)

Approximate install time: 5 hours

