



# BECKER COMPACT LINE

## COMMUNICATION & NAVIGATION



### ATC 4401

#### Full Solid State Single Block Transponder

■ The ATC 4401 has been designed as a part of the Becker Compact Line for all aircraft and helicopters where small dimensions and light weight are essential. It has the same look and similar size as the successful transceiver AR 4201. The mounting behind the panel is as simple as for the AR 4201.

Outstanding performance combined with low power consumption is provided in two certified versions

ATC 4401-250 with min. 250 Watt transmit power  
ATC 4401-175 with min. 175 Watt transmit power

Both versions are state of the art designs with fully transistorized transmitters and compliant with the current, most stringent operating standards.

The ATC 4401 is of course certified according JTSO and TSO regulations.

The sunlight readable display is illuminated for night operations. The display shows in addition to the transponder code also the current flight level, if an encoding altimeter is connected and Mode-C is selected. Despite the small size, the operation is simple and straight forward. It even allows the one button recall of two preselected codes.

The ATC 4401 operates from 9.5 to 32.2 V DC. This makes it suitable for almost every application in general aviation.

A standard encoding altimeter or blind encoder can be connected. ■

**BECKER**  
AVIONIC SYSTEMS

# Becker Flugfunkwerk GmbH

## Technical data ATC 4401

### General data:

■ Supply voltage	9.5 V to 32.2 V DC
■ Typ. consumption at (without panel illum.)	5544 (1200/sec) 0.50 A at 13.75 V (250 W) 0.40 A at 13.75 V (175 W) 0.30 A at 27.5 V (250 W) 0.25 A at 27.5 V (175 W)
– in standby mode	0.27 A at 13.75 V 0.14 A at 27.5 V
■ Panel illumination	≤ 0.10 A at 13.75 V ≤ 0.05 A at 27.5 V
■ Power-up time	3 sec. (internal self-test)
■ Ext. fuse protection	3 A slow-blow
■ Serial interface	RS 422 (9600 baud)
■ Operating temperature	- 20 °C to + 55 °C (short-time + 70 °C)
■ Storage temperature	- 55 °C to + 85 °C
■ Operating altitude in accordance with EUROCAE/RTCA ED-14D/DO-160D	15000 ft. - 175 W 50000 ft. - 250 W Cat. C1
■ Vibration resistance in accordance with EUROCAE/RTCA ED-14D/DO-160D	Cat. NM
■ Humidity in accordance with EUROCAE/RTCA ED-14D/DO-160D	Cat. A / + 50 °C; 95 %, 48 h
■ Mechanical dimens.	
– Front panel	61.3 x 61.3 mm (H x W) (2.413 x 2.413 inch)
– Case depth	204 mm (8.031 inch)
■ Weight	0.725 kg (1.598 lb)
■ Test and assembly standards	RTCA DO-150 TSO/JTSA C74c, C88a EUROCAE MPS/WG9/1-71


### Receiver data:

■ Operating modes	ModeA ModeA+C
■ Receive frequency	1030 MHz ± 0.2 MHz
■ Sensitivity (MTL)	- 74 dBm (for 90 % reply rate)
■ Selectivity	± 15 MHz > 40 dB ± 25 MHz > 60 dB
■ Dynamic range	≥ 60 dB
■ Bandwidth	± 3 MHz < 3 dB
■ Side lobe suppression	3-pulse method
■ Nominal impedance	50 Ω

### Transmitter data:

■ Transmit frequency	1090 MHz ± 3 MHz
■ Transmitter type	Solid state
■ Transmit power	min. 250 W / 175 W at antenna socket
■ Reply limitation	effective as from 1200 replies / sec.
■ Nominal output impedance	50 Ω
■ Reply code (mode A)	ICAO coding system with 4096 reply possibilities
■ Flight level code (mode C)	ICAO coding system 100-foot steps from - 1000 to 35000 ft.
■ Transmit pulse shape	pulse width 0.45 μs ± 0.1 μs rise time 0.05 to 0.1 μs fall time 0.05 to 0.2 μs

Product specification and design features may be altered without notice

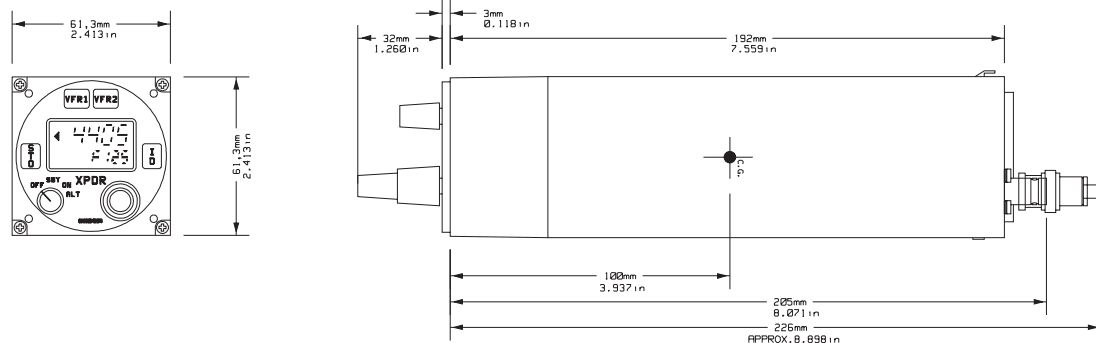

Becker Flugfunkwerk GmbH  
Victoria Boulevard B 108  
77836 Rheinmünster/Germany  
Tel. +49 (0) 72 29 / 305-0  
Fax +49 (0) 72 29 / 305-217  
e-mail: info@becker-avionics.de  
http://www.becker-avionics.de

**BECKER**  
AVIONIC SYSTEMS