


Tighten nut to force cord to ear.

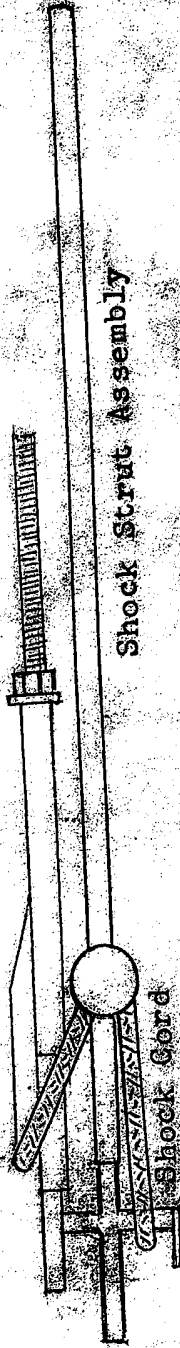

THREADED PORTION MUST BE
CLEANED AND HEAVILY LUBRICATED
EACH TIME TOOL IS USED. FAILURE
TO DO THIS VOIDS THE WARRANTY.