





Revision level			Revision Record	Changad	Date	Approved	Date	
Drawing	State	Part	Revision Record	Changed	Date	Approved	Date	
02.1	Design Release	-	SEE ECN# 013710	CTF	2/7/2017	JPG	2/7/2017	

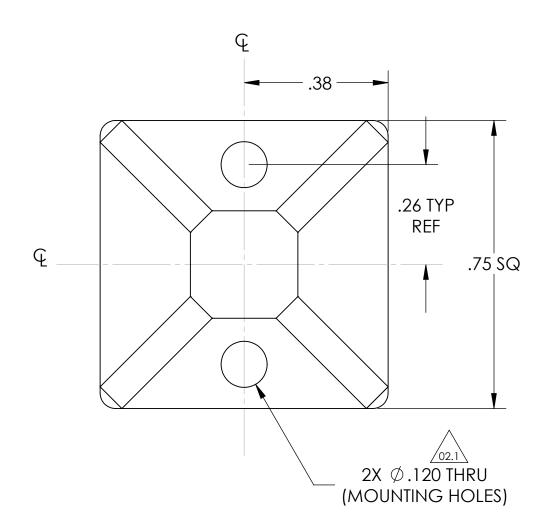

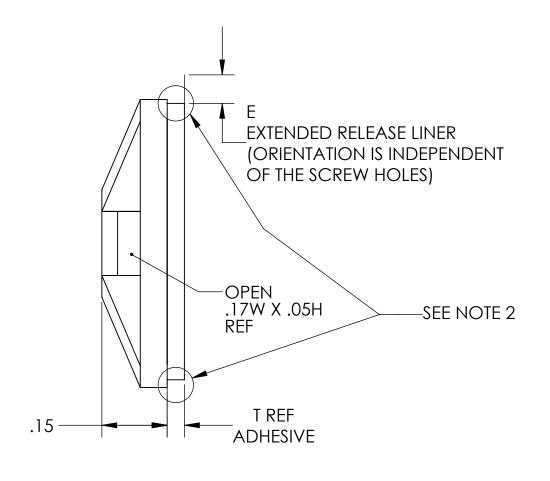



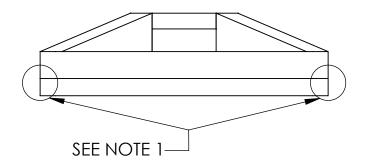



Notes

1. TAPE MAY BE FLUSH OR EXTEND BEYOND
2. TAPE MAY BE FLUSH OR INSIDE THE MOU
3. SHELF LIFE IDENTIFIED ON: LOCATION TB
4. MOUNTING SURFACE, APPLYING ADHESI
AND OIL. IT IS RECOMMENDED TO USE 5:
AND WATER PRIOR TO APPLYING
5. STORE PRODUCT IN ITS ORIGINAL PACKA
AND 50% OF RELATIVE HUMIDITY, OUT 0
6. STORE PRODUCT IN ITS ORIGINAL PACKA
AND 0-95% RELATIVE HUMIDITY, THE OP'
(22°C) AND 50% RELATIVE HUMIDITY OUT

aterial			

orawn	KEP	4/13/2016				
Approved	JPG	4/13/2016	Ti			
			1			

YOND THE EDGE OF THE MOUNT	Material SEE CHART SHEET 2	Units: inches  Dimension without tolerances details to:  .XXXX = ±.0005 .XXX = ±.005 .XXX = ±.01 .X = ±.03 None = ±.06  Dimension without tolerances details to: reserved by HellermannTyton.  It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.		Drawn	KEP	4/13/2016	Article/Type-No SEE CHART SHEET 2	S	Scale	4:1
MOUNT EDGE N TBD			Approved	JPG	4/13/2016 Title MOUNTING BASE, 4 WA		, F	Project Number PRP16-0338		
HESIVE TO, IS CLEAN, DRY, AND FREE OF GREASE JSE 50:50 MIXTURE OF IPA (ISOPROPYL ALCOHOL)			It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of	🖺 Hellermannโซน์ดก 📙			SELF-ADHESIVE			
ACKAGING BETWEEN 50°F TO 86°F (10°C TO 30°C) DUT OF DIRECT SUNLIGHT ACKAGING BETWEEN 40°F TO 100°F (4°C TO 38°C)							Drawing-No PRODUCTION :	Phase F	ormat	В
E OPTIMUM STORAGE CONDITIONS`ARE 72°F OUT OF DIRECT SUNLIGHT.		$\angle = \pm 0.5^{\circ}$ Dimension Formatted in/[mm]	·				16-0338-001-CSU	S	Sheet	1/2

SW2015						Revision level			Revision F	Record	Changed	Date	Approved	Date
					Drawing D2.1 D	State Design Release	Part -	SEE EC	N# 013710		CTF	2/7/2017	JPG	2/7/2017
		02.1	02.1	02.1							02.1	02.1		
	TYPE NAME	T ±0.005	E ±0.030	STORAGE CONDITIONS		MOUNT	ING M	IETHO	D	MOUNT MATERIAL	COLOR	PART NUMBEI	CABLE T	E SERIES
											BLACK			
									PA66	IVORY				
	MB3	N/A	N/A	N/A	#4 SCREW (NOT INCLUDED)				WHITE					
									PA66HIRHSUV		BLACK			
										VO FLAME RETARDAN		L		
			0.134								BLACK			
02.1		0.036		SEE NOTE 5	EE NOTE 5 241-00		-001-01 RUBBER FOAM TAPE			PA66HIRHSUV	IVORY		- T18 THRU 1	RU 130
											WHITE			
	MB3A										BLACK			
02.1		.045	.13	SEE NOTE 6	24	1-002-02 A	CRYLIC	FOAN	1 TAPE	PA66	IVORY			
											WHITE			
		.045	.13	SEE NOTE 6	URA	D3PX5011E	ACRYI	LIC FOA	AM TAPE	PA66HIRHSUV	BLACK			
Notes M SEE SHEET 1	aterial	Units:	inches			Drawn	roved JPG 4/13/20		4/13/201	6 Article/Type-No SEE CH.	ART SHEET	2	Scale	4:1
	EE CHART		cion without ces details to: = ±.0005 = ±.005	The copyright of t reserved by Helle It is issued on condi reproduced, copied, third party, either w without the c	this drawing ermannTytor ition that it is	Approved  Approved			4/13/201	6 Title MOUNTING	G BASE, 4 WAY, MB3, ELF-ADHESIVE		Project Numb	er 16-0338
		.xx .x None	= ±.01 = ±.03 = ±.06 = ±0.5°	reproduced, copied, third party, either w without the c Hellermanr	wholly or in possessions of also on the possession of a supplement of the possession	He He	N Email: co eb: www	mar orth Ame orp@htam .hellerma	nnlylo[ rica ericas.com nn.tyton.com	Drawing-No 16-033		PRODUCTION:	Phase Format Sheet	B 2/2