

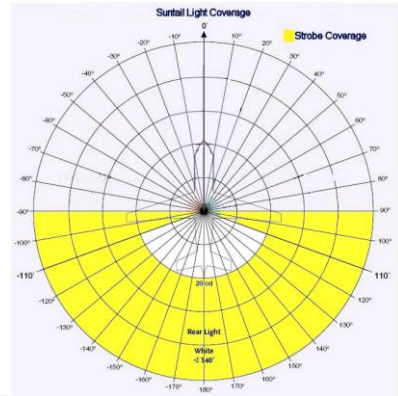
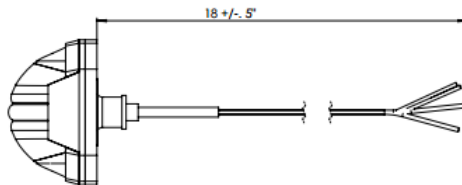



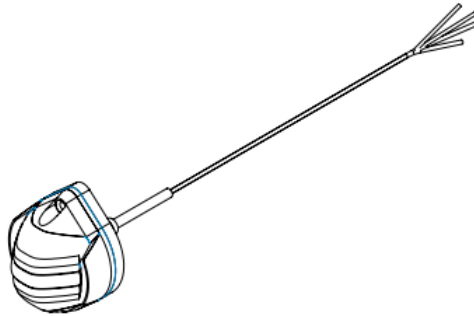

**Product Datasheet**  
**SunTail Position/Strobe Light**  
**11-1260-12**

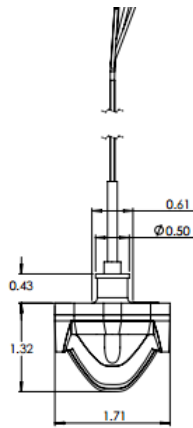

Voltage: 9-18VDC  
 Position Current: 0.4A at 14V  
 Strobe Peak Current: 3.3A at 14V, for 0.19 seconds  
 Power: 17 Watts Average  
 Power Supply: Built In  
 Synchronization: Built In  
 Thermal Protection: Built In  
 Position: TSO C-30c Type III  
 Strobe: TSO C-96a Class II (100L to 100R) TSO C-96a Class III (90L to 90R)  
 LED Count: 18

Length: 2.2"  
 Width: 1.7"  
 Height: 1.4"  
 Weight: 2.6 Oz  
 Heat Sink Material: Aluminum/ Clear Coat  
 Lens Material: Polycarbonate  
 MTBF: >30,000 Hours  
 Temperature Range: -55C to +70C