


AA ALKALINE
3 YR LIFE

MOUNTING
6/32 C.S.
.4 PL.



DIM CONTROL

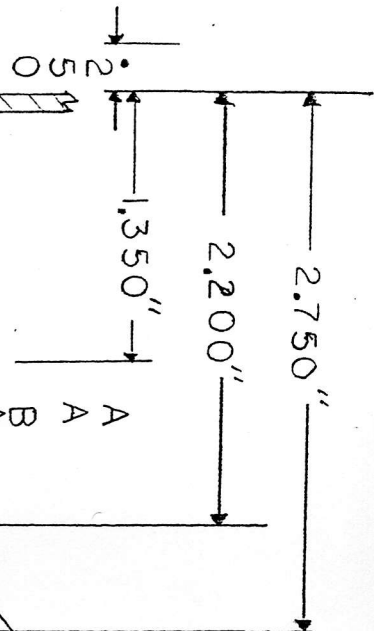



NOTE-28 VOLT
CLOCK MUST BE
MOUNTED TO A
METAL PANEL
FOR COOLING

LOCKING CONN.

MFG. POSITRONICS
MD9F-20J-VL

CONN. SUPPLIED WITH CLOCK

4 VOLT CLOCK NEEDS NO ADDITIONAL COOLING

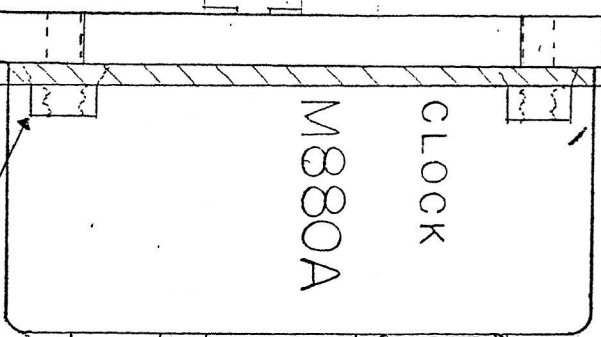

REMOTE SWITCH

CONTROL

14 OR 28V .01 AMP

+28 VOLTS D.C. 1/2 AMP

GND. 1 AMP BREAKER

WILL OPERATE ON 28 VOLTS WITH A 20 OHM
25 WATT RESISTOR IN SERIES WITH INPUT

