

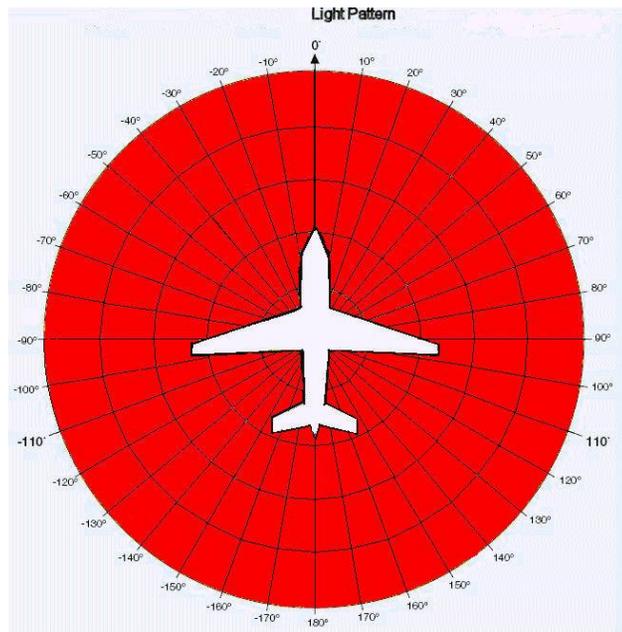


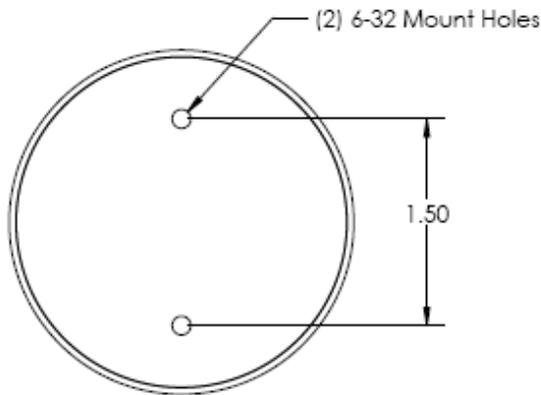

Product Datasheet
SunBeacon II 360 Red LED Beacon
11-2200-A-12 (12V)
11-2200-A-24 (24V)

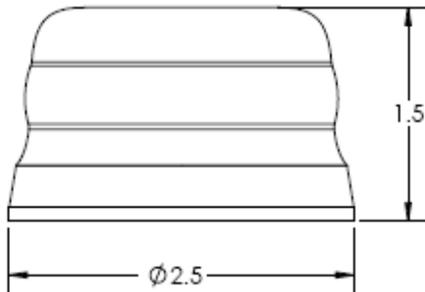

Voltage: 9-16VDC 12V
 18-32VDC 24V
 Strobe Average Current: 1.2A at 14V, 0.6A at 28V
 Strobe Peak Current: 8.8A at 14V, 4.4A at 28V
 Power: 16 Watts Average
 Power Supply: Built In
 Synchronization: Built In
 Thermal Protection: Built In
 Beacon: TSO-C96a Class I and Class III
 LED Count: 48

Length: 2.5"
 Width: 2.5"
 Height: 1.5"
 Weight: 4.1 Oz
 Heat Sink Material: Aluminum/Clear Anodized
 Lens Material: Polycarbonate
 MTBF: >30,000 Hours
 Temperature Range: -55C to +70C