

AN BOLTS

AN Bolts

- Made of high-strength type 4037 or 8740 alloy steel
- Centerless ground & threaded
- Minimum tensile strength 125,000 PSI
- Cadmium plated per spec QQ-P-416A, Type II, Class 3
- 431 Stainless steel (CRES)


ANX(C or H)-X(A)

AN = DIAMETER


C = CORROSION RESISTANT STEEL

H = DRILLED HEAD

A = UNDRILLED SHANK

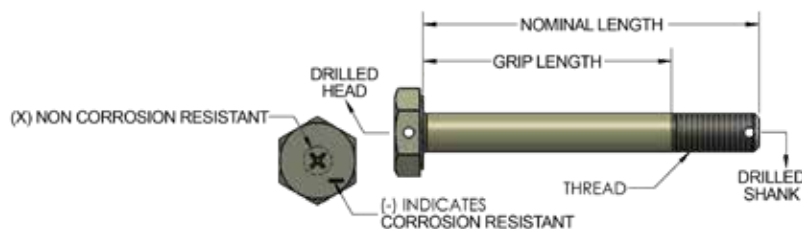


**FOR UNDRILLED
ADD THE LETTER "A"
EXAMPLE:
AN6 - 10A**




UNDRILLED

**FOR DRILLED SHANK
NO LETTER
EXAMPLE!
AN6 - 10**




**SHANK ONLY
DRILLED**

**FOR DRILLED HEAD
ADD "H" AND "A"
EXAMPLE:
AN6H-10A**



**HEAD ONLY
DRILLED**

**FOR DRILLED HEAD AND
SHANK
ADD "H" ONLY
EXAMPLE:
AN6H-10**



**BOTH HEAD AND
SHANK DRILLED**

Bolts are sold "EACH"		AN3					AN4				
ALL BOLTS		Grip Length	Cadmium Plated AN3 (10-32)		Stainless AN3C (10-32)		Grip Length	Cadmium Plated AN4 (1/4-28)		Stainless AN4C (1/4-28)	
Dash No.	Nominal Length		Drilled Price	Undrilled "A" Price	Drilled Price	Undrilled "A" Price		Drilled Price	Undrilled "A" Price	Drilled Price	Undrilled "A" Price
-3	15/32	1/16	.	.	.	.	1/16	.	.	.	.
-4	17/32	1/8	.	.	.	.	1/16	.	.	.	.
-5	21/32	1/4	.	.	.	.	3/16	.	.	.	.
-6	25/32	3/8	.	.	.	.	5/16	.	.	.	.
-7	29/32	1/2	.	.	.	.	7/16	.	.	.	.
-10	1-1/32	5/8	.	.	.	.	9/16	.	.	.	.
-11	1-5/32	3/4	.	.	.	.	11/16	.	.	.	.
-12	1-9/32	7/8	.	.	.	.	13/16	.	.	.	.
-13	1-13/32	1	.	.	.	.	15/16	.	.	.	.
-14	1-17/32	1-1/8	.	.	.	.	1-1/16	.	.	.	.
-15	1-21/32	1-1/4	.	.	.	.	1-3/16	.	.	.	.
-16	1-25/32	1-3/8	.	.	.	.	1-5/16	.	.	.	.
-17	1-29/32	1-1/2	.	.	.	.	1-7/16	.	.	.	.
-20	2-1/32	1-5/8	.	.	.	.	1-9/16	.	.	.	.
-21	2-5/32	1-3/4	.	.	.	.	1-11/16	.	.	.	.
-22	2-9/32	1-7/8	.	.	.	.	1-13/16	.	.	.	.
-23	2-13/32	2	.	.	.	.	1-15/16	.	.	.	.
-24	2-17/32	2-1/8	.	.	.	.	2-1/16	.	.	.	.
-25	2-21/32	2-1/4	.	.	.	.	2-3/16	.	.	.	.
-26	2-25/32	2-3/8	.	.	.	.	2-5/16	.	.	.	.
-27	2-29/32	2-1/2	.	.	.	.	2-7/16	.	.	.	.
-30	3-1/32	2-5/8	.	.	.	.	2-9/16	.	.	.	.
-31	3-5/32	2-3/4	.	.	.	.	2-11/16	.	.	.	.
-32	3-9/32	2-7/8	.	.	.	.	2-13/16	.	.	.	.
-33	3-13/32	3	.	.	.	.	2-15/16	.	.	.	.
-34	3-17/32	3-1/8	.	.	.	.	3-1/16	.	.	.	.
-35	3-21/32	3-1/4	.	.	.	.	3-3/16	.	.	.	.
-36	3-25/32	3-3/8	.	.	.	.	3-5/16	.	.	.	.
-37	3-29/32	3-1/2	.	.	.	.	3-7/16	.	.	.	.
-40	4-1/32	3-5/8	.	.	.	.	3-9/16	.	.	.	.
-41	4-5/32	3-3/4	.	.	.	.	3-11/16	.	.	.	.
-42	4-9/32	3-7/8	.	.	.	.	3-13/16	.	.	.	.
-43	4-13/32	4	.	.	.	.	3-15/16	.	.	.	.
-44	4-17/32	4-1/8	.	.	.	.	4-1/16	.	.	.	.
-45	4-21/32	4-1/4	.	.	.	.	4-3/16	.	.	.	.
-46	4-25/32	4-3/8	.	.	.	.	4-5/16	.	.	.	.
-47	4-29/32	4-1/2	.	.	.	.	4-7/16	.	.	.	.
-50	5-1/32	4-5/8	.	.	.	.	4-9/16	.	.	.	.
-51	5-5/32	4-3/4	.	.	.	.	4-11/16	.	.	.	.
-52	5-9/32	4-7/8	.	.	.	.	4-13/16	.	.	.	.
-53	5-13/32	5	.	.	.	.	4-15/16	.	.	.	.
-54	5-17/32	5-1/8	.	.	.	.	5-1/16	.	.	.	.
-55	5-21/32	5-1/4	.	.	.	.	5-3/16	.	.	.	.
-56	5-25/32	5-3/8	.	.	.	.	5-5/16	.	.	.	.
-57	5-29/32	5-1/2	.	.	.	.	5-7/16	.	.	.	.
-60	6-1/32	5-5/8	.	.	.	.	5-9/16	.	.	.	.