



CFC FREE NU

LVC CONTACT CLEANER




FEATURES

- Reduced VOCs (Volatile Organic Compounds)
- Conforms to C.A.R.B. (California Air Resources Board), O.T.C. (Ozone Transport Commission) and LADCO (Lake Michigan Air Directors Consortium) regulations
- Fast evaporating
- Ideal for electronic and fine parts
- Cleans delicate precision mechanisms
- Safe on plastics
- Penetrating action removes dirt, flux, moisture, dust, oxides and other contaminants
- Does not contain chlorinated solvents
- No residue

APPLICATIONS

- Connectors
- Contacts
- Magnetic Tape Heads
- Office Equipment
- Printed Circuits
- Controls
- Semiconductor Assemblies
- Switches
- Telephone Equipment

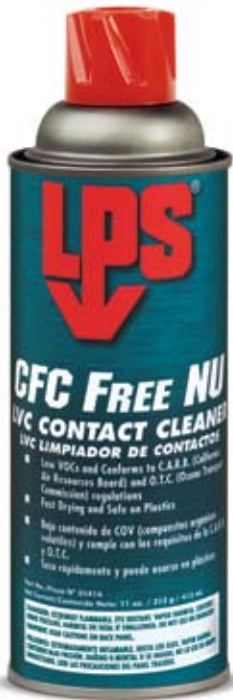

PROPERTIES

% Non-Volatiles:
50 ppm maximum

VOC Content:
74%, 600 g/L

% HCFCs:
0%

KB Value:
23

Flash Point:
0°F (-18°C)

Specific Gravity (water=1):
0.811

Surface Tension:
17.3 dynes/cm @ 77°F (25°C)

Propellant:
HFC - 134a

PACKAGE

Net Fill
11 oz. (312 grams) aerosol

Part No.
05416

MATERIAL SAFETY DATA SHEETS AVAILABLE UPON REQUEST OR VISIT OUR WEB SITE: WWW.LPSLABS.COM

LPS Laboratories • An Illinois Tool Works Company

P.O. Box 105052 • 4647 Hugh Howell Road • Tucker, GA 30085-5052 • TEL: (800) 241-8334 or (770) 243-8800 • FAX: (800) 543-1563 or (770) 243-8899

Internet Web Site: www.lpslabs.com

©2009 LPS Laboratories • LPS® is a registered trademark of Illinois Tool Works • Printed in U.S.A. • All Rights Reserved • Form #2235 • Rev. 3/2009